イルミス

イルミスアルファ

· 厚み6.8mmの自由サイズのスマートな照明ユニットパネル
· 両面型製作可能

INDOOR　SEMI PRODUCT　LIGHTING　USE ADAPTER　SINGLE SIDE

CLEAR

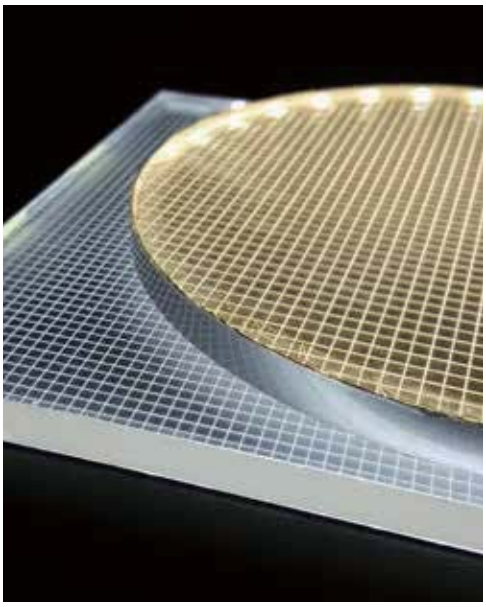

A1 SIZE

| 製品製作 |

Step 1: 製作希望の形状・図面の提供をいただきます
Step 2: 図面作業、LEDの方向と消費電力を計算し、図面製作と見積書の作成
Step 3: 図面のご確認
Step 4: 製作作業
Step 5: 納品

| 製品図面 |

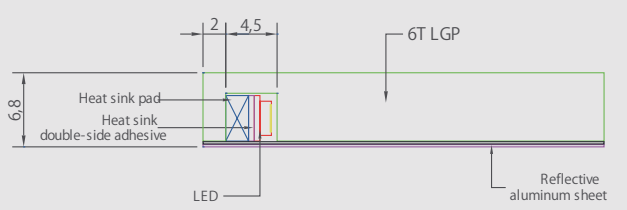

| 仕様＆特徴 |

商品名	Item	Description	特徴
イルミス アルファ	Main Material	PMMA Acrylic	- 色温度 6500K (3000K, 4000K, 5000K) - 導光板 6T - 電源装置 : DC 12V , 24V (CE, UL,PSE 認証) - 入力電圧 AC 100~220V　ACアダプター - アルミメタル反射シート - 断面図 - 製品厚さ：6.8mm
	Thickness	6.8mm (other thicknesses available upon request)	
	Operating Voltage	DC 12V /24V	
	Input Voltage (Power Supply)	AC 100 ~ 240V 50/60Hz	
	LED	2835 SMD TOP VIEW LED	
	Reflector sheet	Aluminum reflector plate	
	Color Temperature (CCT)	3000K, 4000K, 5000K, 6500K	
	CRI (color rendering index)	Min. 80	
	Diffuser Film	Option	
	Maximum Size	1200mm (47.24") x 2400mm (94.48")	
	Minimum Size	50mm (1.97") x 50mm (1.97")	
	Weight	9 Kg (based on 1000mm x 1000mm)	
	Life Span	More than 50,000 hours	
	Warranty on LED	2 years	
	Operating Temperature	5 ~ 35° C (41 ~ 95° F)	
	Component	Illumice alpha, Adaptor, Extension wire(option), Dimmer(option) Divided connector(option)	

納入例 01

納入例 02

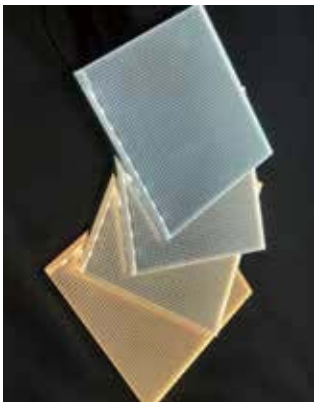

▶ 製品詳細 01

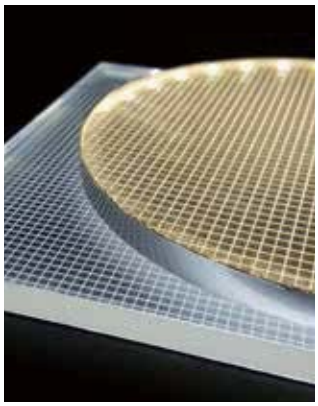

▶ 製品詳細 02

イルミス

イルミス

· 自由なデザインサイズのスマート照明ユニットパネルです。

INDOOR　SEMI PRODUCT　LIGHTING　USE ADAPTER　SINGLE SIDE

CLEAR

A1 SIZE

| 製品使用方法 |

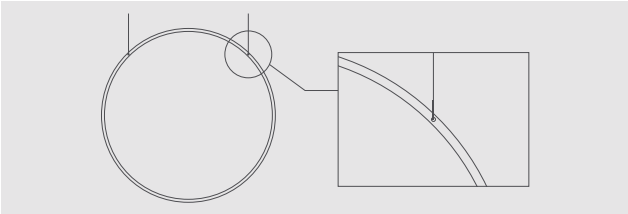

1. 両側の穴に吊り下げワイヤーで吊る吊式　2. 電気配線は配線コードを使用

| 製品図面 |

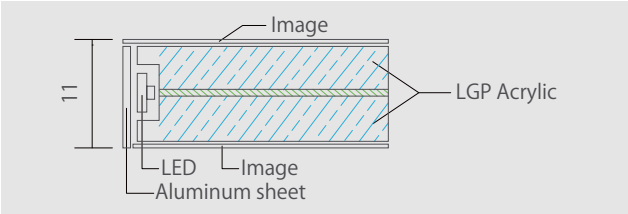

| 仕様＆特徴 |

モデル名	注文番号	形状	サイズ (mm)	消費電力 (watt)	重量 (Kg)	特徴
イルミス 片面 / 両面	1	円形 長方形 カスタム形状	100	5	0.3	- 色温度 6500K (3000K, 4000K, 5000K) - 導光板 10T - 電源装置 : DC 12VA , 24VA (CE, UL,PSE認証) - 入力電圧 AC 100~220V　ACアダプター - アルミメタル反射シート - 片面型 /両面型 - 製品厚さ : 11mm
	2		200	9	0.7	
	3		300	13	1.2	
	4		400	18	2.1	
	5		500	22	3.0	
	6		600	27	4.3	
	7		700	32	6.0	
	8		800	36	7.3	
	9		900	41	9.5	
	10		1000	46	12.0	
特別注文可能	最小サイズ:100mm x 100mm /最大サイズ:1100mm x 1100mm / サイズ・消費電力・重量は参考値です。					

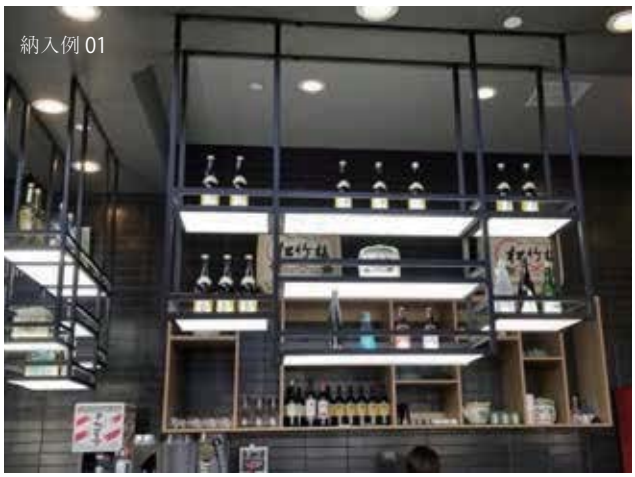
納入例 01

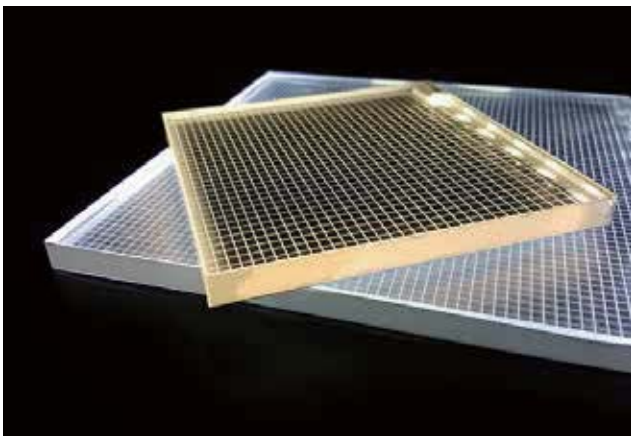

▶ 製品詳細 01

イルミス

イルミスデュアル

· 色温度 (2300K ~ 6500K) と明るさ調整が可能なデュアルパネル
· お好みの形に製作が可能なデュアルパネル
· 専用リモコンで制御 (色温度・調光)

INDOOR | SEMI PRODUCT | LIGHTING | USE ADAPTER | SINGLE SIDE

CLEAR

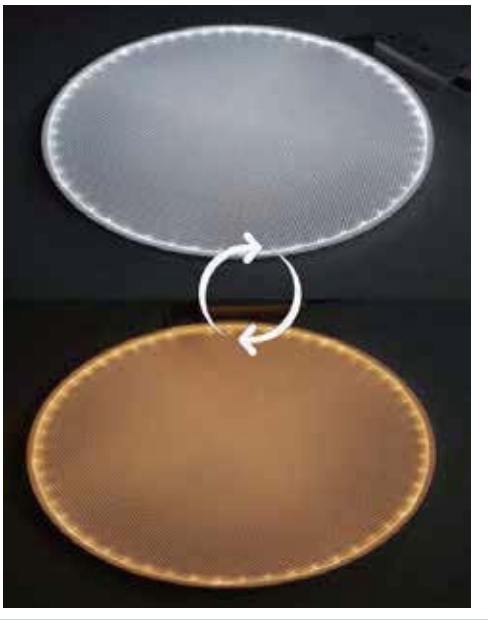

A1 SIZE

| 製品製作 |

Step 1: 製作希望の形状・図面の提供を頂きます
Step 2: 図面作業、LEDの方向と消費電力を計算し、図面製作と見積書の作成
Step 3: 図面のご確認
Step 4: 製作作業
Step 5: 納品

| 製品図面 |

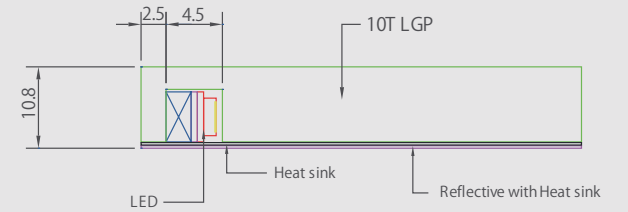

| 仕様＆特徴 |

商品名	Item	Description	特徴
イルミス Dual	Main Material	PMMA Acrylic	- 専用リモコン制御 - 希望の形状に製作可能 - LED色温度変更 2300K~6500K / 明るさ調光 - 導光板 10T - 電源装置 : 12V , 24V - 入力電圧 AC100~220V ACアダプター - アルミメタル反射シート - 断面図 - 製品厚さ : 10.8mm
	Thickness	10.8mm (other thicknesses available upon request)	
	Operating Voltage	DC 12V /24V	
	Input Voltage (Power Supply)	AC 100 ~ 240V 50/60Hz	
	LED	2835 SMD TOP VIEW LED	
	Reflector sheet	Aluminum reflector plate	
	Color Temperature (CCT)	2300K ~ 6500K	
	CRI (color rendering index)	Min. 80	
	Diffuser Film	Option	
	Maximum Size	1200mm (47.24") x 2400mm (94.48")	
	Minimum Size	50mm (1.97") x 50mm (1.97")	
	Weight	9 Kg (based on 1000mm x 1000mm)	
	Life Span	More than 50,000 hours	
	Warranty on LED	2 years	
	Operating Temperature	5 ~ 35° C (41 ~ 95° F)	
	Component	Illumice alpha, Adaptor, Extension wire(option), Dimmer(option) Divided connector(option)	

納入例 01

納入例 02

納入例 03

納入例 04

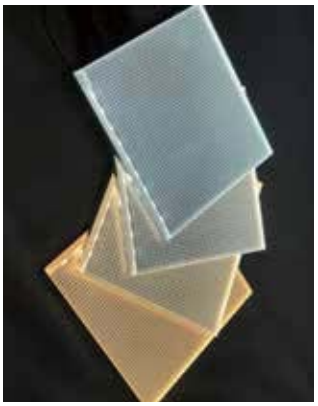
▶ 製品詳細 01

▶ 製品詳細 02

イルミス

イルミス RGB

・オリジナルサイズのＲＧＢカラー仕様のスマート照明ユニットパネル

INDOOR　SEMI PRODUCT　LIGHTING　USE ADAPTER　SINGLE SIDE

CLEAR

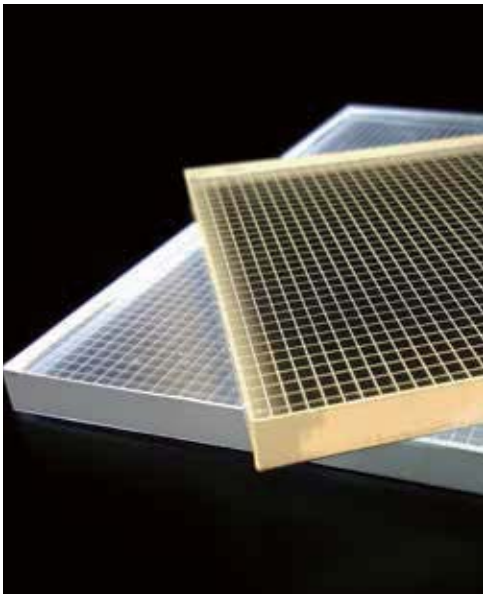

A1 SIZE

| 製品製作 |

Step 1: 製作希望の形状・図面の提供をいただきます。

Step 2: 図面作業、LEDの方向と消費電力を計算し、図面製作と見積書の作成

Step 3: 図面のご確認

Step 4: 製作作業

Step 5: 納品

| 製品図面 |

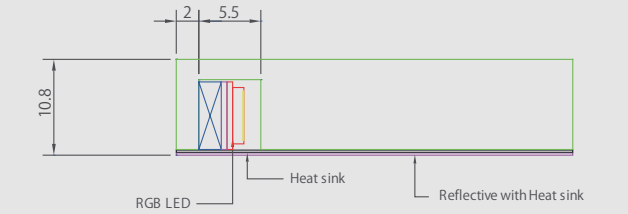

| 仕様＆特徴 |

商品名	Item	Description	特徴
イルミス RGB	Main Material	PMMA Acrylic	- LEDモジュールRGB - 導光板 10T - 電源電圧 : 24V - 入力電圧 AC 100~220V - アルミメタル反射シート - 断面図 - 製品厚み : 10.8mm
	Thickness	8.8mm (other thicknesses available upon request)	
	Operating Voltage	DC 12V /24V	
	Input Voltage (Power Supply)	AC 100 ~ 240V 50/60Hz	
	LED	2835 SMD TOP VIEW LED	
	Reflector sheet	Aluminum reflector plate	
	Diffuser Film	Option	
	Maximum Size	1200mm (47.24") x 2400mm (94.48")	
	Minimum Size	110mm (4.3") x 110mm (4.3")	
	Weight	11 Kg (based on 1000mm x 1000mm)	
	Life Span	More than 50,000 hours	
	Warranty on LED	2 years	
	Operating Temperature	5 ~ 35° C (41 ~ 95° F)	
	Component	Ilumice alpha, Adaptor, Extension wire(option), Dimmer(option), Divided connector(option), RGB Controller(option)	

納入例 01

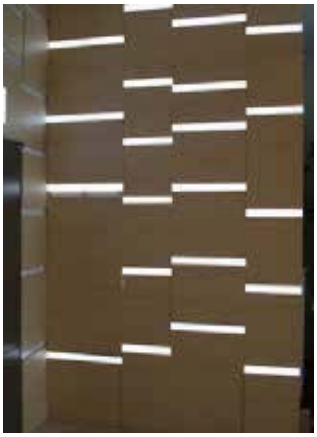

納入例 02

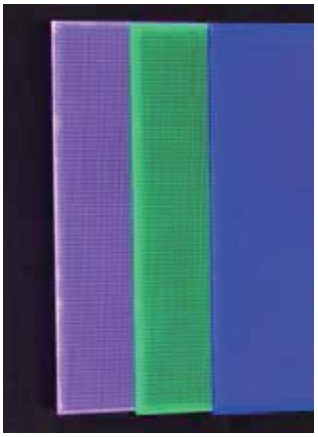

▶ 製品詳細 01

▶ 製品詳細 02